



# Sintex

## INSTALLATION

1. Excavate the pit according to size of the tank. It shall be 600 mm at the bottom and 1200 mm at the top over and above the tank diameter

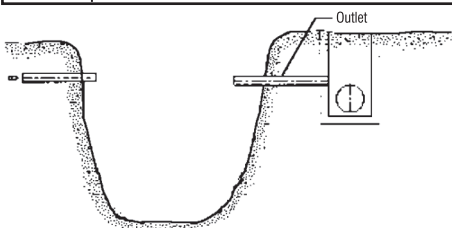


2. Check the foundation

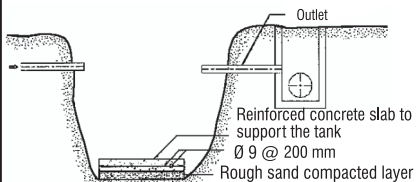


(Please consult with the Civil Engineer, in case of soft soil)

3. Place the tank down to the pit.

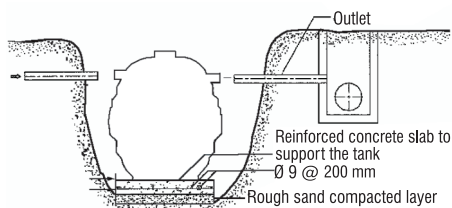


(Please consult with the Civil Engineer, in case of soft soil)


4. Connect the inlet, outlet, air-vent, air pipe and fill the water up to half of tank and cover the pit with sand.

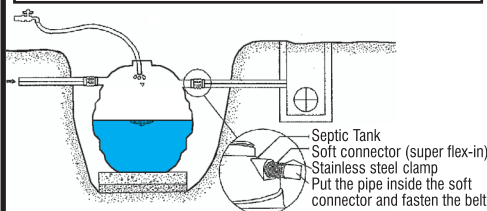


5. Fill water inside the tank up to overflow level and back fill the sand up to the neck of tank.

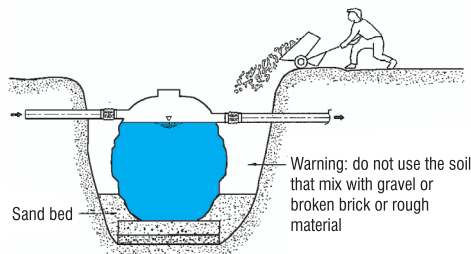


6. Make the concrete floor to tighten the mouth of tank.

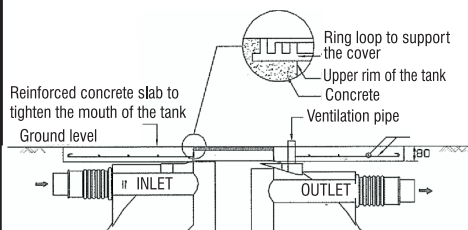

7. In case the tank is on ground level.

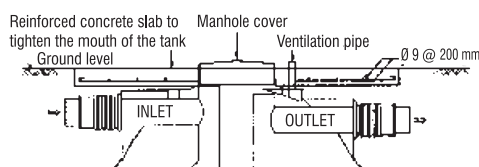

8. In case the tank is below ground level.

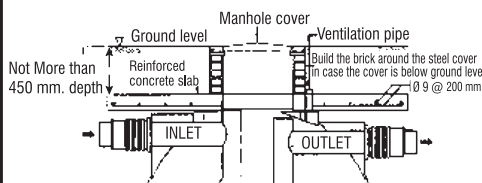

**Note: Not recommended for installation in driveway area.**



**SINTEX INDUSTRIES LIMITED PLASTICS DIVISION** KALOL (N. GUJARAT) 382 721. INDIA  
Ph.: 253500, Fax : (02764) 253800 E-mail : [plastic@sintex.co.in](mailto:plastic@sintex.co.in) [www.sintex-plastics.com](http://www.sintex-plastics.com)